

## Class V


**Ball Weight – 635 kg**

**G.T.W. – 6,350 kg**

**Shank – 2"**

The only Air Receiver specifically engineered to be used with weight distribution. The patented design uses a **heavy duty air bag** to eliminate shock transfer from trailer to towing vehicle.

- Sold steel 2" shank to handle the heavy loads
- Four Steel Tie-Rods rated at 7,300kg each ensuring a 29,200kg shock and shear rating.
- Two commercial air shocks to prevent oscillation
- Eight hole adjustable mount plate allowing for multiple height adjustments and accepts weight distribution brackets, ball mounts, and pintle mounts.
- No bearings to crush or wear-out, instead we use the military tough Nyloil® which is a self lubricating nylon. So tough you can actually machine it.
- Powder coated for a tough durable finish giving longer life and increased visual appeal.
- Engineered using Solid Works® the world's most recognized engineering software.
- Assembled with Class 5 nuts and bolts
- Brass air fittings insure long life and helps ensure against air leaks
- Shipped in custom formed foam clamshell and custom designed heavy duty cardboard box making sure the product arrives in tip-top shape.
- **2 year warranty.**

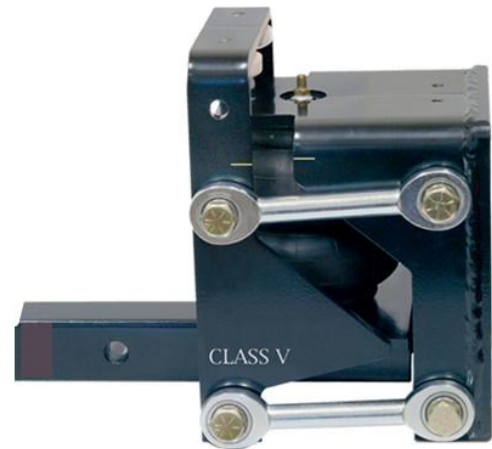

### Available Mounting Plates



**Standard 50mm and 70mm Ball Mount**



**Weight Distribution Bracket**



**150mm Drop Bracket to suit 50/70mm Ball**



**Larger Bracket to suit DO45 Style Couplings**



**Standard bolt pattern to suit various Pintle Hook setups**



**Shocker Kits available**